Sheenus ZERO

Ultrasonic Polisher





Sheenus ZERO is a high-speed polishing machine providing ultrasonic vibration, 40 μ m max vibration amplitude with 29 kHz per second. Sheenus ZERO provides minimal hand vibration while maintaining high efficiency power. A heat protection function improves safety.

Improved visibility

An informative digital LED display on the controller clearly shows the operation function. Blue LED on the handpiece flashes during operation to indicate power ON.

High efficiency power

Sheenus ZERO applies optimized frequency to the tools. Power transmission performance is increased by 16% compared with previous model.

Heat protection function

Sheenus ZERO automatically suppresses the output and keeps the temperatures from rising, allowing for continuous use.

Improved energy savings

Rated power consumption is reduced by 13% compared with previous model.

(SHEENUS neo: 31 W → Sheenus ZERO: 27 W)

Light weight

The weight of controller is reduced by 29% compared with previous model.

(SHEENUS neo: 2.1 kg → Sheenus ZERO: 1.5 kg) Convenient to carry around.

- Adapted the worldwide power supply, 100 240V
- High-frequency noise is reduced by a sine wave drive.

Sheenus ZERO set

- Sheenus ZERO can be used for grinding, polishing and mirror finishing on a wide range of materials from aluminum dies to cemented carbide dies. It is also perfect for plastic molds, press, casting, forging, trimming and header dies.
- This tool quickly removes hard layers of EDM deposits and polishes difficult areas such as complex corners and ribs.
- Capabilities include deburring, grinding and polishing of precision molds, dies electronic and ceramic components.



Code No.	Model
7775	US-50P Set 120V
7776	US-50P Set 230V

*Adapted the worldwide power supply, 100 - 240V. Please choose the plug type of main power cord.

Standard equipment -

- ●Controller: 1 pc.
- ●Handpiece: 1 pc.
- ●Tools: 1 set

#60101 Electroplated diamond file (#200, Flat taper, 4 x 50 mm, t=0.4): 1 pc. #60519 Ceramic fiber grindstone (#800, Flat, 6 x 50 mm, t=1.0): 1 pc. #60902 Tip holder (For round, \$\phi\$ 3.0 tip): 1 pc. #60922 Tip holder (For flat, t=1.0 tip): 1 pc.

- ●Tool box (Plastic): 1 pc.
- ●Spanner (10 mm): 2 pcs.
- ●Hexagon wrench (2.5 mm): 1 pc.
- ●Foot switch (FC-24): 1 pc.
- Spare fuse (T1.6AH 250V): 2 pcs.
- ●Main power cord (2 m): 1 pc. (Plug type: 120V or 230V)



Sheenus ZERO Controller

- Powerful Max. output power is 45 W.
- Digital Display
 The LED display can be switched between the amplitude and WATT.
- Safety

The heat protection function can be set to detect abnormal heat.

Specifications -

Oscillation frequency: 19 kHz - 29 kHz
Frequency control: Auto-tracking system
Outputs: 45 W (max.) UNCLAMP mode
20 W (max.) CLAMP mode
Output adjustment: 21 steps variable
Rated input: AC 100 - 240V
Rated power consumption: 27 W
Dimensions: W 161 x D 256 x H 84 mm
Weight: 1.5 kg

Standard accessories

- ●Spare fuse (T1.6AH 250V): 2 pcs.
- ●Main power cord (2 m): 1 pc. (Plug type: 120V or 230V)



Sheenus ZERO is not compatible with SHEENUS neo.



- A Power level indicator
- B Indicator (Display the amplitude, WATT and ERROR)
- C UP key / DOWN key
- D ERROR / WATT
- E ON / OFF key (Start and stop the handpiece)
- F CLAMP key
- G Main power switch
- H UNCLAMP key



	Code No.	Model			
	7778	Sheenus ZERO CONTROLLER 120V			
	7779	Sheenus ZERO CONTROLLER 230V			

*Adapted the worldwide power supply, 100 - 240V. Please choose the plug type of main power cord.

LED

Sheenus ZERO Handpiece

Comfortable Usability

Light weight, ergonomically designed resin body enables effortless, precision work over long periods of time.

Easy Tool Installation

Easy tool installation using spanners.

Spanners. Sheenus ZERO Us-sir coccocc uncrassen

Specifications

Oscillator: PZT piezoelectric type Attachment fixing: M6 x P0.9 screw Cord length: 3 m

Cord length: 3 m

Dimensions: Max. ϕ 28 x L 134 mm Weight: 140 g (excluding cable)

Sheenus ZERO is not compatible with SHEENUS neo.

*Tip holder and ceramic fiber grindstone in this picture are not provided when only handpiece is purchased.

Nakanishi genuine tools are highly recommended.


Code No. Model
7780 US-50P

Sheenus ZERO Spare Parts

Product	Code No.	Description
	8103	FC-24 Foot switch (ON/OFF switch only)
1	_	Spanner 10 mm Available in the market
		Hexagon wrench 2.5 mm Available in the market

Sheenus ZERO Tools

*Order in standard package quantities.

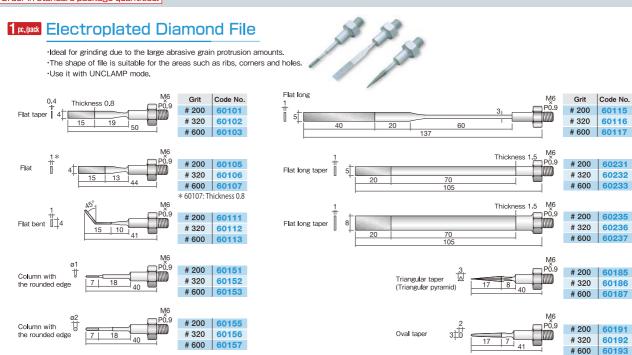

2 pos./pook Ceramic Fiber Grindstone Tip



·Alumina fiber abrasive with the strength and the flexibility for final polishing.

200

320 # 600

- ·Soft feeling in use and good cutting quality contribute comfortable finishing.
- ·Provides the smooth surface without scratch.
- ·By dressing it can be used for grinding on fine shape and slit.
- *Use after clamping in special tip holder.




d ø	3 📜				
	50				
	Grit		Color	Code No.	
	#	220	Gray	60551	
	#	300	Magenta	60552	
	#	400	Orange	60553	
	#	600	Black	60554	
	#	800	Blue	60555	
	# 1	,000	White	60556	
	# 1	,200	Red	60557	

2pcs./pack Special Tip Holder

Round taper



- ·These are special tip holder to clamp the tools
- Choose by tip size and shape.
- ·Use it with CLAMP mode.
- *Please take note that if Nakanishi genuine tools are not used. it may not be possible to maintain the proper performance so as generating abnormal vibration or no vibration.



d=ø2.0 mm $d = \emptyset 3.0 \, \text{mm}$ $d=\emptyset 3.3 \, \text{mm}$ d=ø3.2 mm 60904 Used for round ceramic fiber grindstone tip. Best for soft materials




d=ø2.0 mm | 60911 d=ø3.0 mm 60912 d=ø3.2 mm 60913

Grain diameter Code No.

60901

60902

Used for round electroplated diamond file. Best for hard materials.



 $t = 3.3 \, \text{mm}$

t=0.8 mm | 60921

60922

60923

60924

♦Order by Code No.

 $t = 1.0 \, \text{mm}$

 $t = 2.0 \, \text{mm}$

 $t = 3.0 \, \text{mm}$



American Rotary Tools Company

250 West Duarte Road Monrovia, California USA 91016-7464 email: info@artcotools.com - Tel: +1 (626) 358-8466 - Toll Free: +1 (800) 624-2212